


# DX830 Thermal & UV CTP

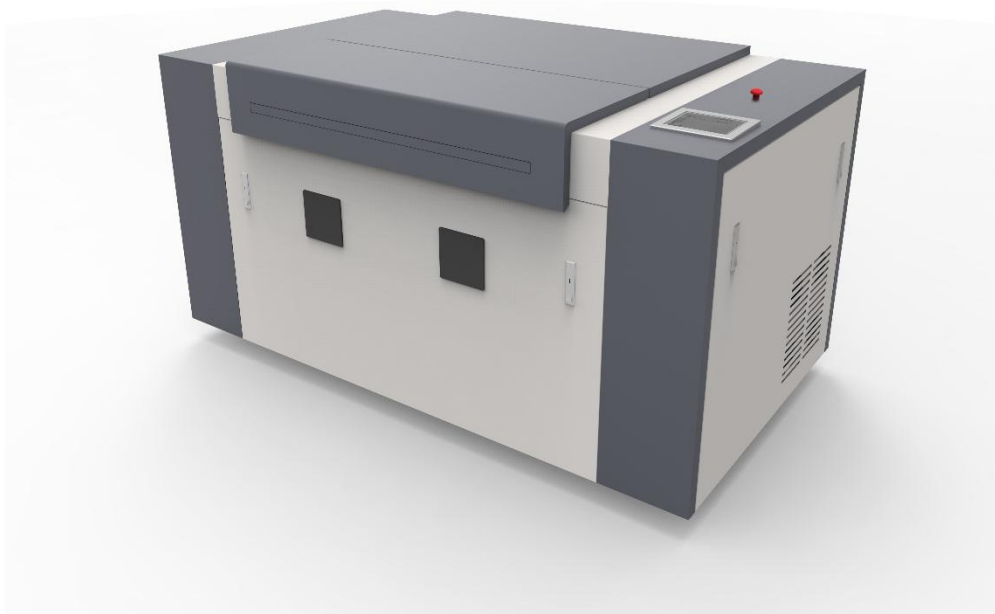

	DX830T/U-I	DX830T/U-II	DX830T/U-III	DX830T/U-IV
Laser system	830/405nm LD, 32 channels	830/405nm LD, 48 channels	830/405nm LD, 64 channels	830/405nm LD, 96 channels
Resolution	2400dpi			
Output speed	15p/h(745mm×605mm)	25p/h(745mm×605mm)	30p/h(745mm×605mm)	40p/h((745mm×605mm)
Exposure Structure	External drum			
Plate size	Max. 830mm×660mm; Min. 450 mm×340mm			
Plate thickness	Thermal (830nm) 0.15~0.4mm		UV (405nm) 0.15~0.4mm	
Max hanged line	300lpi			
FM dots output	20μm			
Repeatability	±0.005mm			
Power supply	AC 220V /50HZ-60HZ 4.5KW Peak (Single phase)			
External dimension	L×W×H =1950mm×1120mm×1130mm 1200kg			